
Schematic Diagram

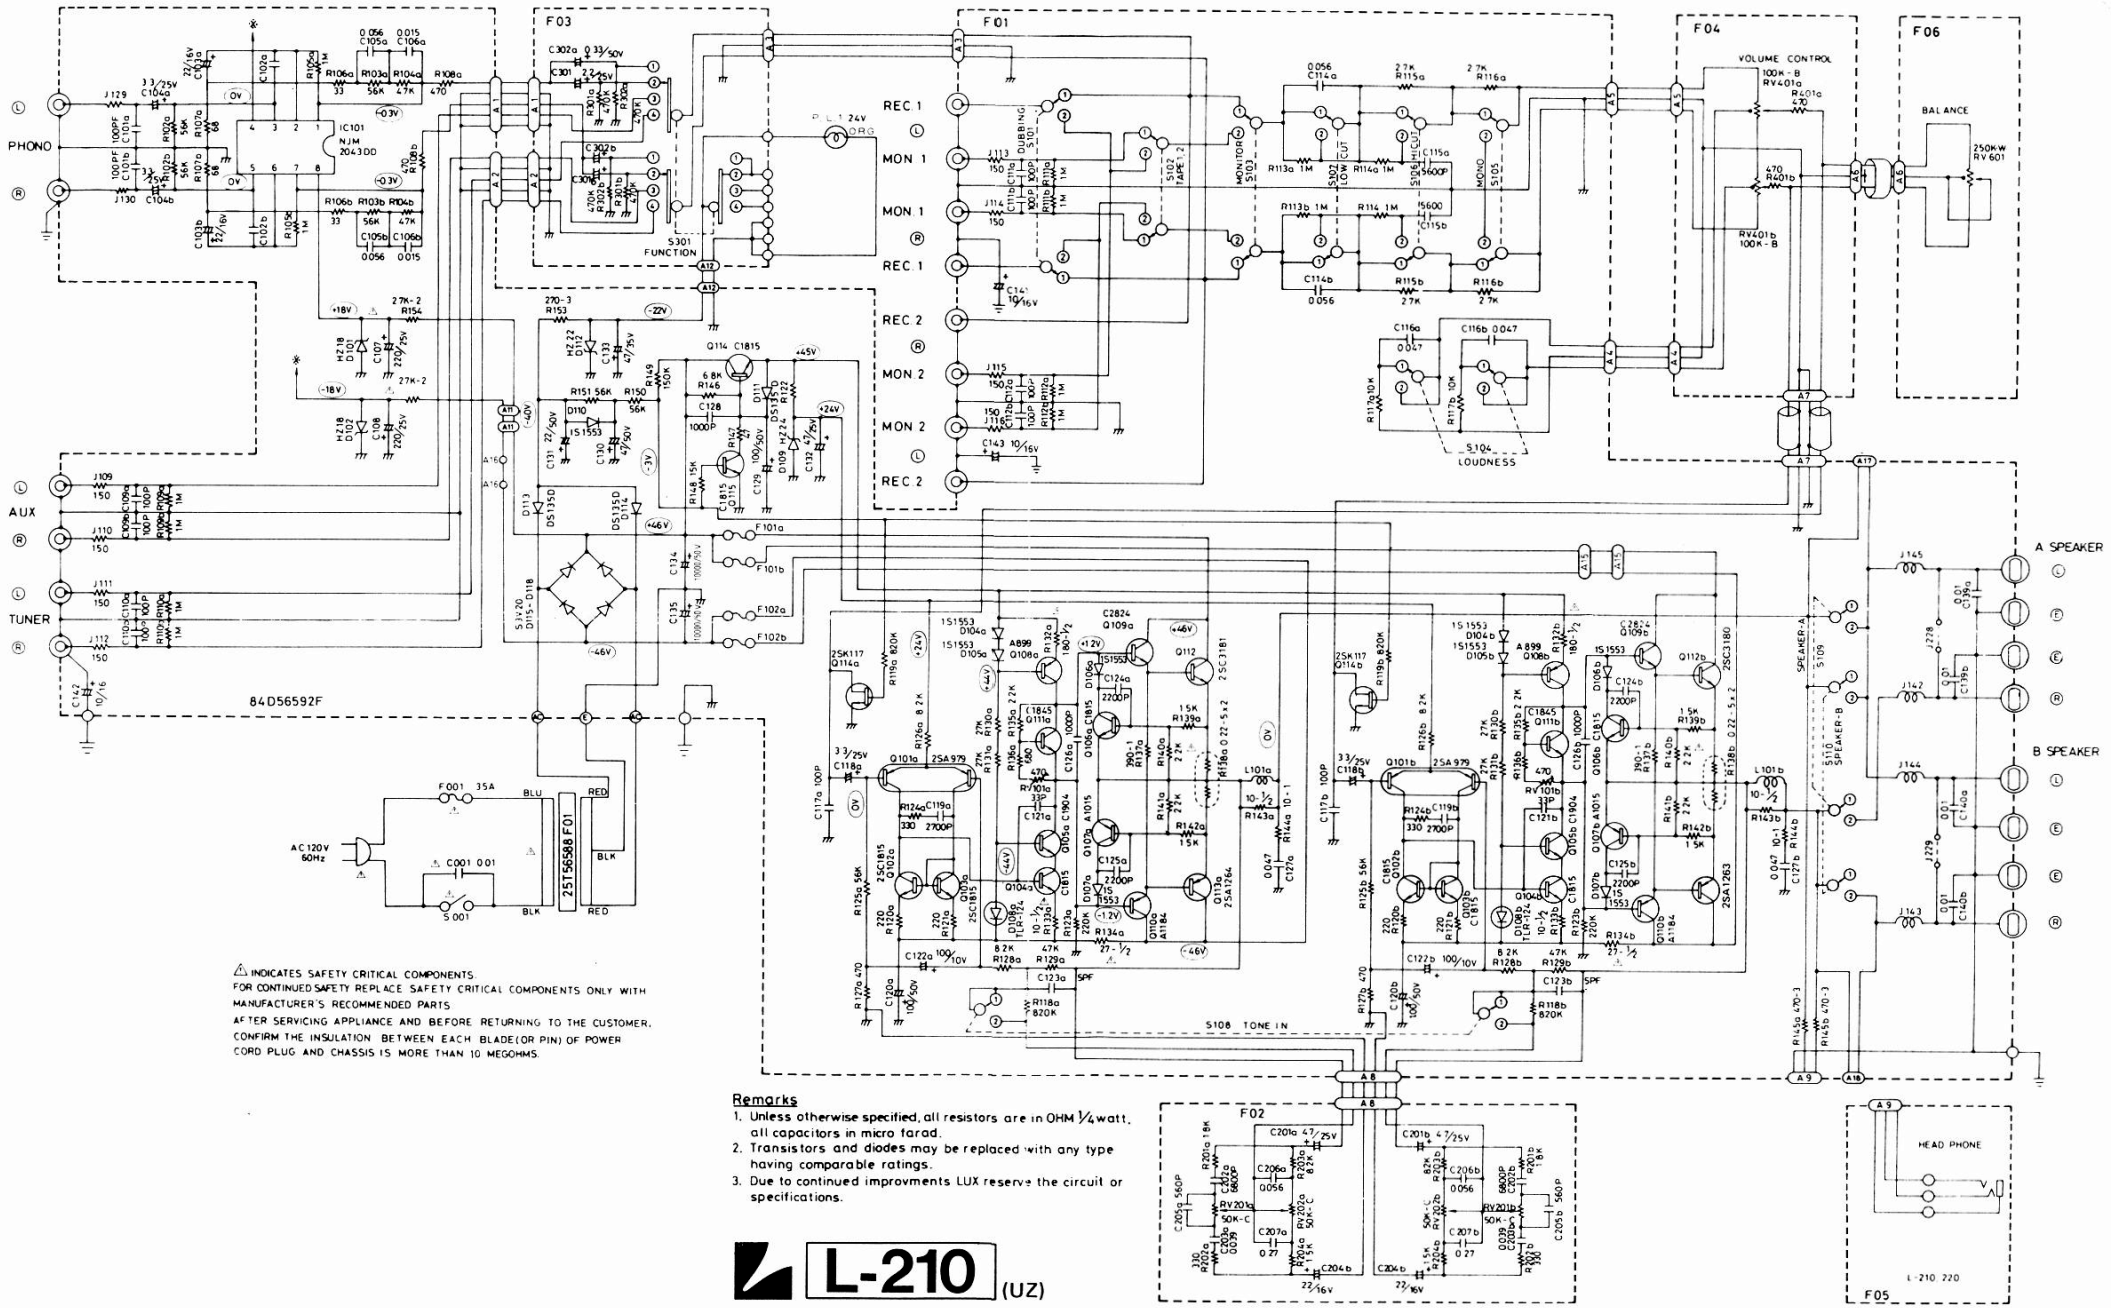

⚠ INDICATES SAFETY CRITICAL COMPONENTS.
FOR CONTINUED SAFETY REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.
AFTER SERVICING APPLIANCE AND BEFORE RETURNING TO THE CUSTOMER, CONFIRM THE INSULATION BETWEEN EACH BLADE(OR PIN) OF POWER CORD PLUG AND CHASSIS IS MORE THAN 10 MEGOHMS.

Remarks

1. Unless otherwise specified, all resistors are in OHM 1/4 watt, all capacitors in micro farad.
2. Transistors and diodes may be replaced with any type having comparable ratings.
3. Due to continued improvments LUX reserve the circuit or specifications.

L-210 (UZ)